


Continuous Hinges



C260


- 2100x76.2x3mm continuous hinge
- Grade 304 stainless steel
- Maintenance free, guaranteed for 25 years
- c/w M5x 30mm wood screws
- Appropriate for use with backcheck door closers
- Maximum adjusted door weight 120kg
- Minimum door thickness 35mm
- Square corners only

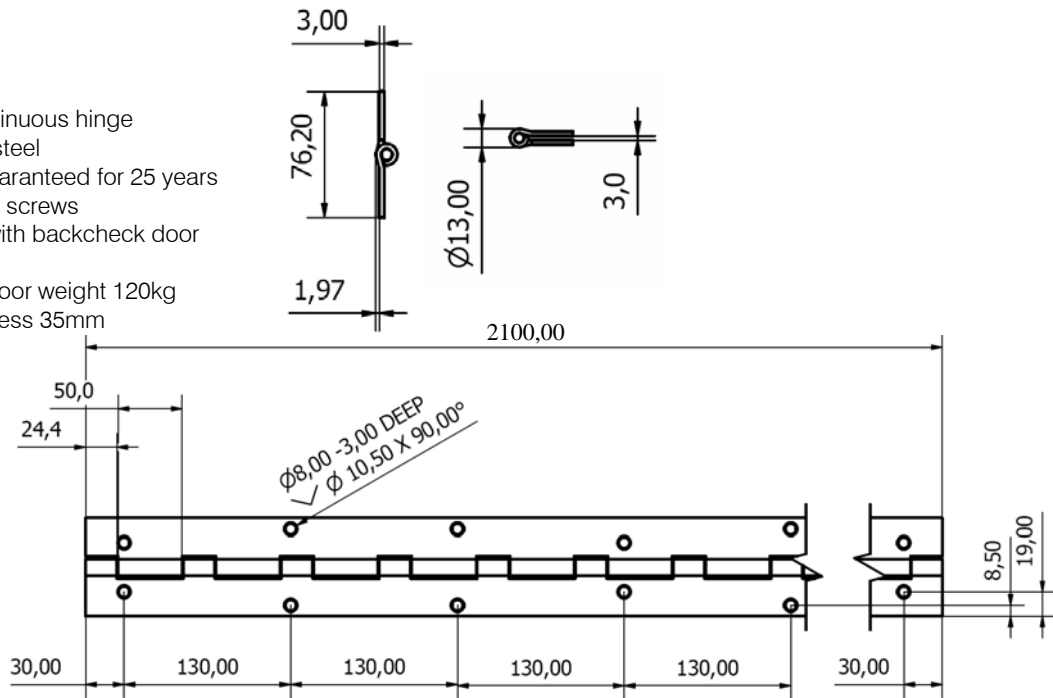

If the hinge fails the door fails, if the door fails the building fails...

C260-300

- 2010x71x3mm continuous hinge
- Grade 304 stainless steel
- Complete with anti-ligature knuckle
- Maintenance free, guaranteed for 25 years
- c/w M5x 30mm wood screws
- Appropriate for use with backcheck door closers
- Maximum adjusted door weight 120kg
- Minimum door thickness 35mm
- Square corners only
- For special lengths please contact the sales office

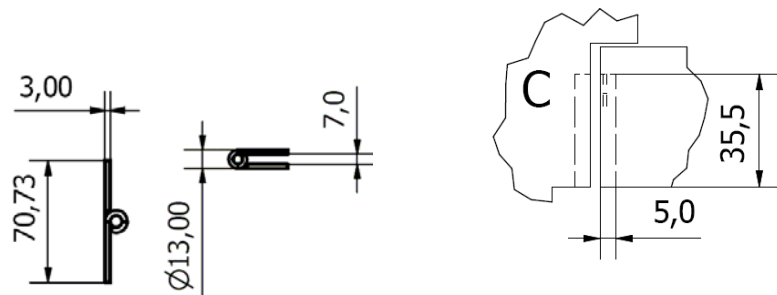

N.b The C260-300 requires special door/frame preparation.

Please see mortice detail "C" for installation.

