


Royde & Tucker H1254-2&3 HI-LOAD conductor hinge

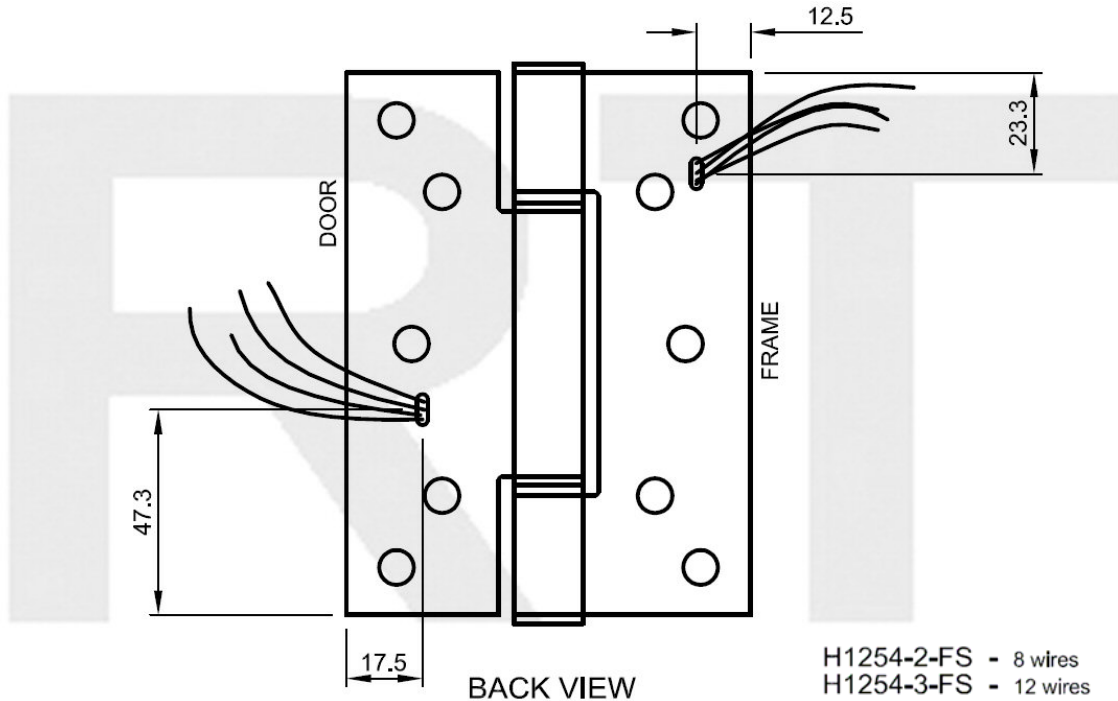

H1254-2-FS - 8 wires
H1254-3-FS - 12 wires

- 125x93x3.25mm Triple knuckle butt hinge
- Grade 304 stainless steel
- Maintenance free, guaranteed for 25 years
- c/w No12 1/1/4 screws
- Appropriate for use with backcheck door closers
- Non load bearing, use as a third hinge
- Tested to 500,000 cycles
- Minimum door thickness 44mm
- Maximum voltage 24v. Maximum current: 2.0 amp per conductor
- Number of conductors 8 or 12
- High temperature wire: Silver plated copper wire with PTFE insulation to BS 2G 210
- High chemical and thermal stability wire
- Wire length: 500mm frameleaf, 1000mm doorleaf
- Unit weight 0.45kg
- Packing box quantity 1 or 15

Royde & Tucker Ltd
Bilton Road
Cadwell lane
Hitchin
SG4 0SB
Tel: 01462 444444
Fax: 01462 444433
www.ratman.co.uk
e-mail: sales@ratman.co.uk