


RAVEN RP65 Magnetic seals

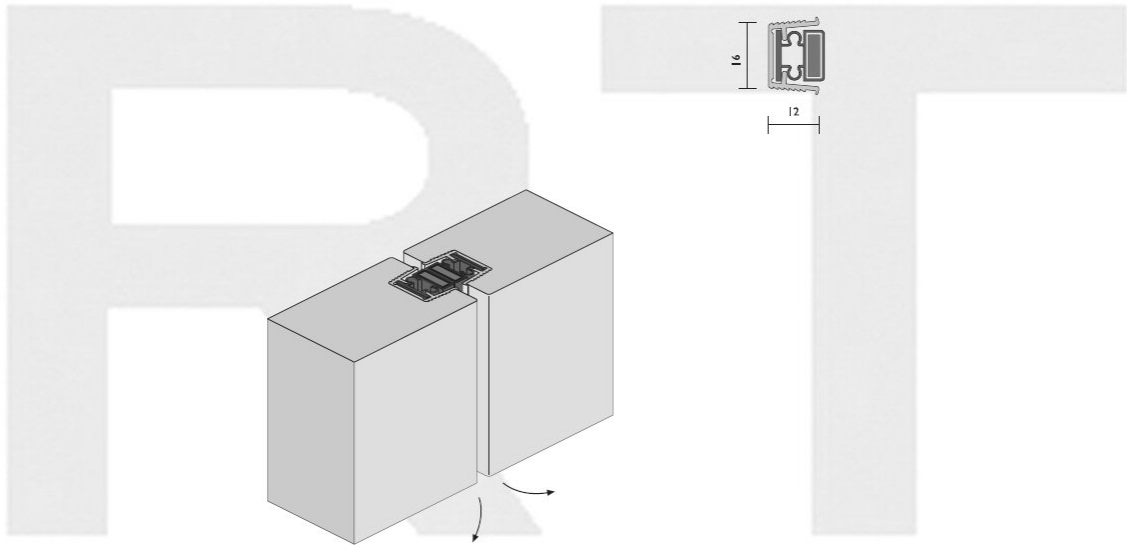

RP65

(M)

A refrigeration type PVC magnetic strip in an anodised aluminium channel, that is morticed into the stiles of hardwood double timber doors, either pivot, sliding or butt hinged, to form an effective astragal. It provides a very positive seal and has sufficient closing strength that latches may not be required.

Location Double swinging doors and sliding door meeting stiles.

Min/Max Gap 5mm to 7mm. (swing doors).

Seal Sizes 2250mm stock lengths

Standard Finish Anodised Satin Clear.

Used in conjunction Door bottom and frame seals.

Note: Centre latching cannot be used in this configuration. The aluminium channel is designed to fit into a 16.5 x 12mm mortice. The magnetic seals are locked to prevent 'creeping'.

Note: RP65 is not recommended for highly active doors. i.e: best suited to infrequent use and door closer hold open applications.



Royde & Tucker Ltd

Bilton Road

Cadwell lane

Hitchin

SG4 0SB

Tel:01462 444444

Fax:01462 444433

www.ratman.co.uk

e-mail: sales@ratman.co.uk