





Royde & Tucker H207 HI-LOAD concealed bearing butt hinge

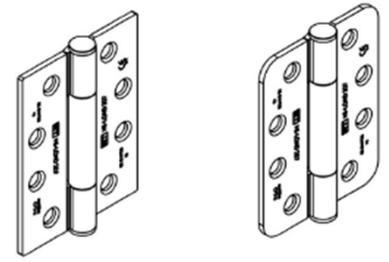


H207-FS

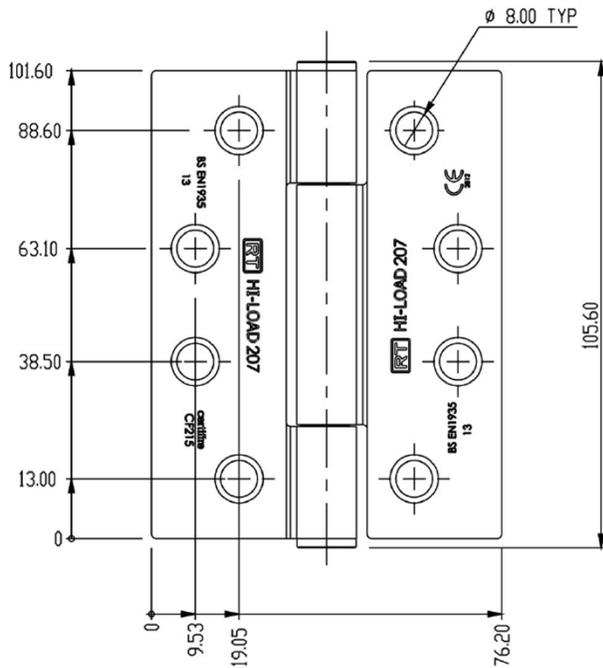

H207-FR

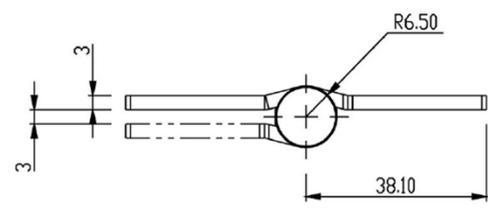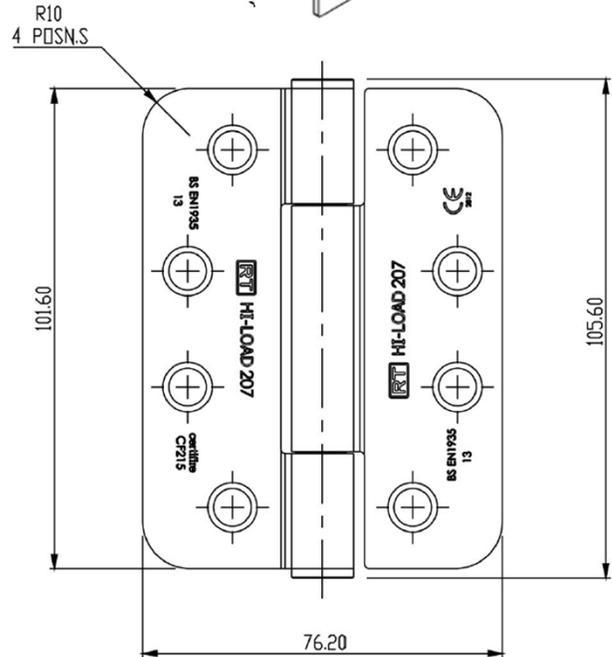

BS EN 1935



- 101.6x76.2x3mm Three knuckle butt hinge
- Template drilled hole pattern as standard
- Jig drilled hole pattern (square corner only)
- Available in Raised Barrell/Knuckle version H207-R
- Maximum adjusted door weight 120kg
- To BS EN 1935 Grade 13
- Tested to over 1m cycles at 120kg
- Independently tested to in excess of 2.5m cycles
- Minimum door thickness 35mm
- Maintenance free, guaranteed for 25 years
- CE Certificate No. 2812-CPR-AC0007 (SS)
- CE Certificate No. 2812-CPR-AC0008 (MS)
- Suitable for use on fire doors: Certifire approved – CF215
- To be fitted with HP207 intumescent hinge pads, if being installed on fire doors
- c/w metric 5 x 32mm wood screws
- Unless otherwise stated stainless steel substrate, Grade 316 stainless steel available

Royde & Tucker Ltd

Bilton Road
 Cadwell lane
 Hitchin
 SG4 0SB

Tel: 01462 444444

Fax: 01462 444433

www.ratman.co.uk

e-mail: sales@roydeandtuckewr.com