


Royde & Tucker H207-5 HI-LOAD security dog bolt hinge

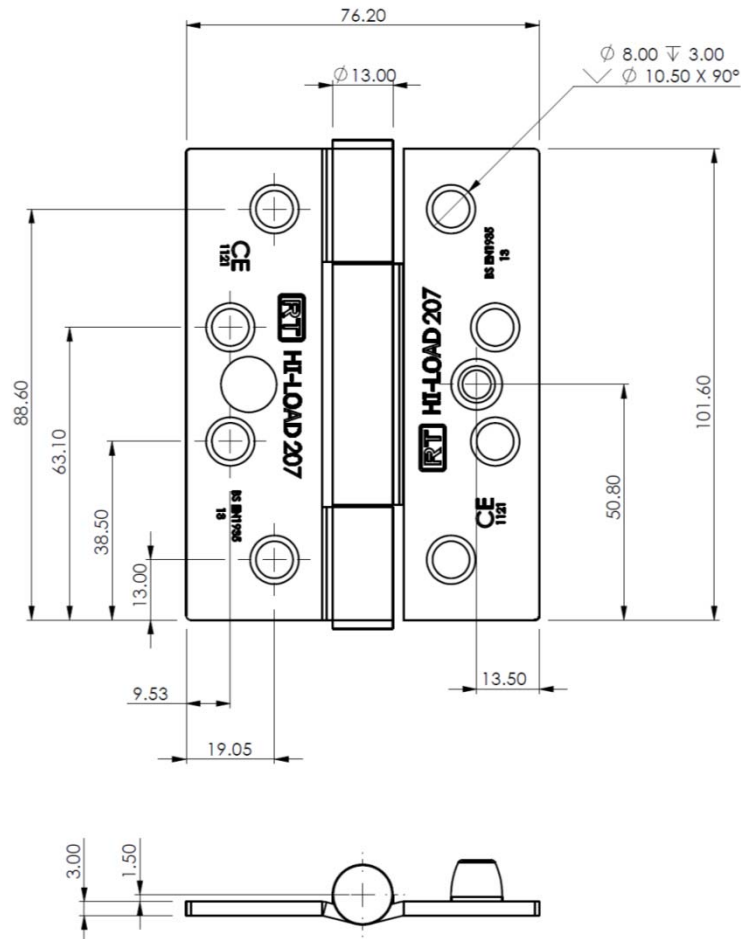

Security dog bolt version. Prevents removal of the door leaf if the hinge knuckle is attacked.

Predominately used on perimeter doors where the hinge knuckle is located externally.

101.6×76.2×3mm Three knuckle butt hinge

Maximum adjusted door weight 120kg

To BS EN 1935 Grade 13

Minimum door thickness 35mm

Tested to over 1m cycles at 120kg

Independently tested to in excess of 2.5m cycles

Maintenance free, guaranteed for 25 years

CE Certificate No. 1121-CPR-AC0007 (SS)

Suitable for use on fire doors: Certifire approved – CF215

To be fitted with HP207 intumescent hinge pads, if being installed on fire doors

c/w metric 5 × 32mm wood screws

Unless otherwise stated, stainless steel substrate, Grade 316 stainless steel available

Royde & Tucker Ltd

Bilton Road

Cadwell lane

Hitchin

SG4 0SB

Tel: 01462 444444

Fax: 01462 444433

www.ratman.co.uk

e-mail: sales@ratman.co.uk